


## CALIBRADOR DE FOLGA EM LÂMINAS AVULSAS

Código	Espessura(T)	Exatidão
4622-02	0.02mm	$\pm 3\mu\text{m}$
4622-03	0.03mm	$\pm 3\mu\text{m}$
4622-04	0.04mm	$\pm 3\mu\text{m}$
4622-05	0.05mm	$\pm 3\mu\text{m}$
4622-06	0.06mm	$\pm 3\mu\text{m}$
4622-07	0.07mm	$\pm 4\mu\text{m}$
4622-08	0.08mm	$\pm 4\mu\text{m}$
4622-09	0.09mm	$\pm 4\mu\text{m}$
4622-10	0.10mm	$\pm 4\mu\text{m}$
4622-12	0.12mm	$\pm 5\mu\text{m}$
4622-15	0.15mm	$\pm 5\mu\text{m}$
4622-18	0.18mm	$\pm 6\mu\text{m}$
4622-20	0.20mm	$\pm 6\mu\text{m}$
4622-25	0.25mm	$\pm 6\mu\text{m}$
4622-30	0.30mm	$\pm 7\mu\text{m}$
4622-35	0.35mm	$\pm 7\mu\text{m}$
4622-40	0.40mm	$\pm 8\mu\text{m}$
4622-45	0.45mm	$\pm 8\mu\text{m}$
4622-50	0.50mm	$\pm 9\mu\text{m}$



4622-10

Unid: mm

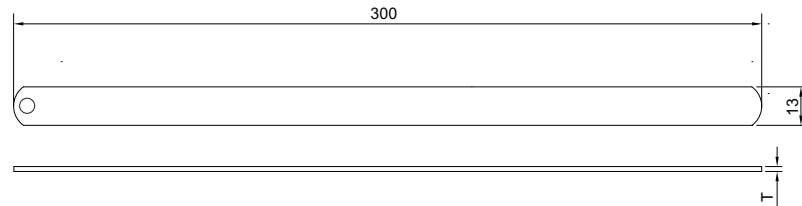

- Usados em trabalhos de verificação de folgas ou como calços em ajuste de dispositivos mecânicos
- Fabricado em aço liga temperado
- Comprimento de 300mm e largura de 13mm